

Χειροκίνητη ενεργοποίηση με μπουτόν

IN+ :

IN- :

relay, μ μ
(μ), to μ 1
μ /
() μ off. μ
μ

Καινοτομίες:

- 1.Ειδική σχεδίαση με ψεκαστήρα και ανεμιστήρα με ειδικές αυλακώσεις που προκαλεί άμεση εκτόνωση και εξαπλωση του καπνού προστασίας.
- 2.Ειδικό δοχείο υλικού παραγωγής καπνού που μπορεί να αφαιρεθεί και να αντικατασταθεί πολύ εύκολα μετά τη χρήση.

Πλεονεκτήματα:

- 1.X μ μ μ - , μ - και διασπώμενα .
- 2.Καπνός ασφαλείας πιστοποιημένος κατόπιν τοξικολογικών μετρήσεων από το Ινστιτούτο πρόληψης και ελέγχου ασθενειών PLA. Επίσης ελεγμένος από το Υπουργείο Δημόσιας ασφάλειας και προστασίας (P.R.C.).
- 3.Κάνει τη διαφορά στην άμεση προστασία και ποτροπή κλοπων και ληστειών στους προστατευόμενους χώρους.

Τεχνικά χαρακτηριστικά

Περιεχόμενα δοχείου	οχε ο καπνού 3 διαμερισμάτων, κοινής ενεργοποίησης
Αντικατάσταση	Εύκολη αντικατάσταση δοχείου καπνού
Χημικός τυπος καπνού	Στερεά βρώσιμα συστατικά
Προστατευόμενη περιοχή	120 m ² κλειστή περιοχή
Γεννήτρια καπνού	Τεχνολογία καπνού ψυχρής ενεργοποίησης
Διάρκεια καπνού	45 λεπτά
Τύπος Ενεργοποίησης	Μπουτόν, τηλεχειρισμός, πίνακας συναγερμού
Χρόνος εκκίνησης	1 δευτερόλεπτο
Χρόνος εκτόνωσης καπνού	5 δευτερόλεπτα
Τροφοδοσία	DC12V 1.5A
Κατανάλωση	18W
Θερμοκρασία Λειτουργίας	-10°C~50°C
Σχετική Υγρασίας	-10%~85%
Εγκατάσταση	Διατίθεται με βάση τοίχου
Υλικό καλύμματος	Αλουμίνιο
Χρώμα	Λευκό
Διαστάσεις	168*101 χιλιοστά
Βάρος	1.7KG

Packing Content

- >Security fog generator (1 piece)
- >Mounting bracket (1 piece)
- >Installation manual (1 piece)
- >Quality certificate (1 piece)

Application


Security fog generator is suitable for indoor environments, such as office, shop, jewelry store, security room, finance room, confidential room, warehouse, bank, base station, museum, etc. Additionally, it is also suitable for ATM and jewelry and clothing shop windows which are easy to be brutally damaged on the street.

Start-up Security Fog Generator

- A. Use panic button or jump foot switch
- B. Use remote controller
- C. Use APP to control alarm host
- D. Use existing eligible security system or smart security alarm system for remote start-up



The minimum cross section of the control wire connecting the controller and the security fog generator is 0.5 square meters (in compliance with national standards), and cable clamps are connected to the sheathing and insulating materials.

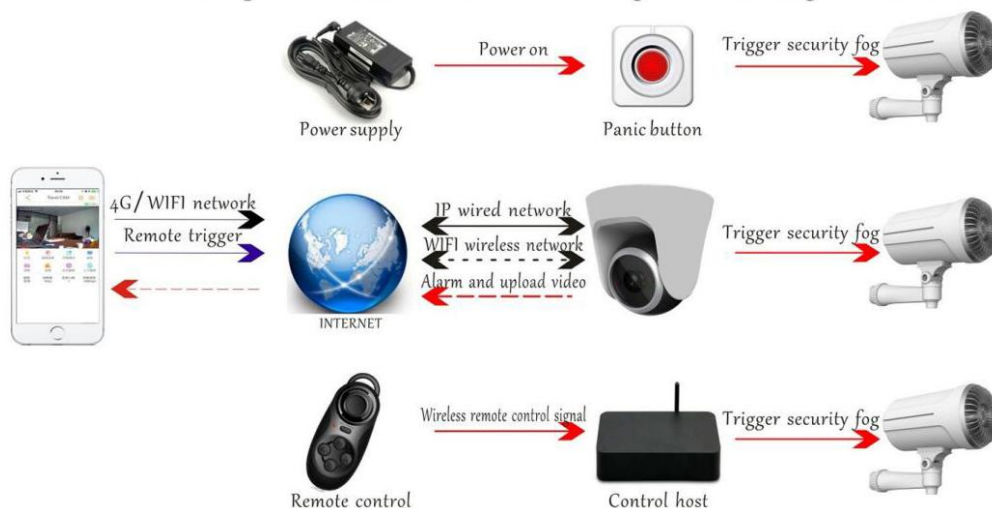

System Test

Test Tools : Multimeter

1. Do not connect to the two control lines on the security fog generator. Connect the output terminal of the controller to the two pointers of the multimeter and set the multimeter to DC.
2. Power on the controller and then press the button / APP trigger / switch to check whether the multimeter displays data or not. (if yes, check the switch or controller damage or not. In normal cases, no data should be displayed when there is no operation). Then, operate through button / mobile APP / switch to check whether the multimeter data 1 specified output voltage and current of this device. If the test shows that the output terminal does not have output value, check whether the power supply is normal, whether the plug is connected, whether the remote controller is damaged or fully charged.

Precaution

- > Carefully read this manual before installing or uninstalling the machine
- > Do not directly power on the machine unless the installation and debug is completed
- > Power off the machine before installation and ensure the control switch is in the off state
- > Before enabling the control switch, ensure the machine is tightly fixed on the mount surface
- > Don't touch the machine enclosure to protect you against scalding after smog is released
- > Don't use the machine in the hot and humid environment
- > Don't use the machine with a severely damaged or worn enclosure
- > Don't place inflammable or explosive goods within 50 kilometers from the location where the machine resides

Statement

Our company assumes no responsibility for damages or losses directly or indirectly lead by using this manual. Contents in this manual are subject to change without prior notice, and the machine delivered prevails. Reproduction is strictly prohibited without our prior written consent

Note

- 1.Please do not connect power when security fog generator installation
- 2.When power connection for device self-test, it will case trigger fog promptly

Please carefully read this manual .



注意安全



禁止烟火